

SANUNO inoxF(S)

■ **Description:**


Table-top, water filter for obtaining filtered drinking water at point of use. Very suitable for the preparation of beverages, water for cooking, etc. Use only for drinking water.

■ **Area of application:**

Device for installation on the faucet at the basin with special deflektor valve making it simple to switch back and forth between filtered and unfiltered water.

■ **Technical Data:**

Item No.:	125UNOVA1 (standard) 125UNOVA2 (with bottom)
Weight:	complete dry approx. 2,9 kg (2,7 kg) complete wet approx 4.,2 kg (4,0 kg)
Flow rate:	approx.120 liters per hour with NFP Premium (standard) (at a water pressure of 4 bar, after 5 minute flow time)
Dimension:	see drawing
Material:	housing, outlet, locking part above and below : steel 1.4541; inner bottom and outlet caps: POM
Contaminant retention:	see data sheet of the used filter cartridge

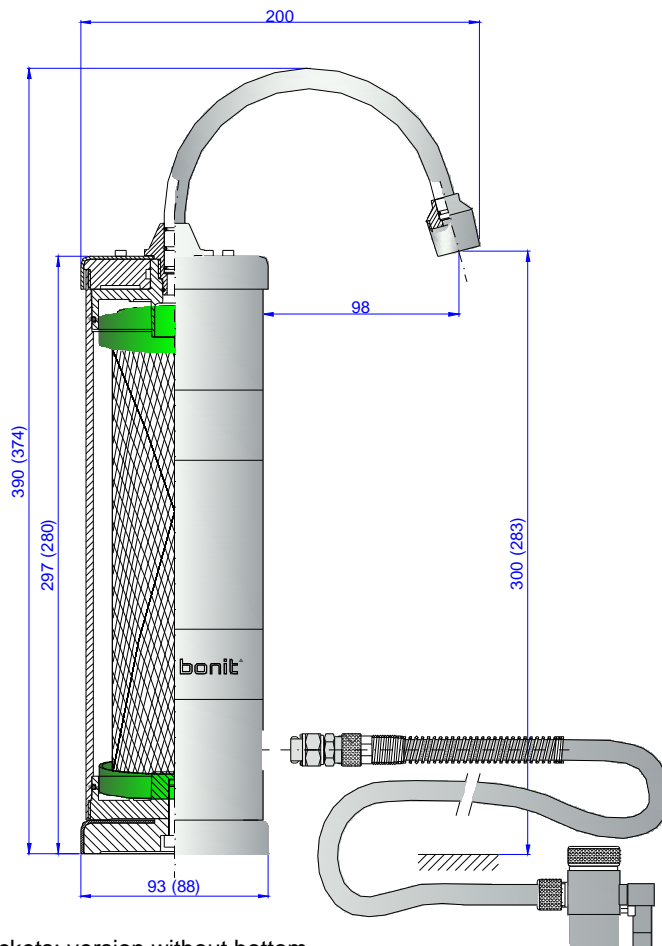

() within brackets: version without bottom



■ **usage instructions:**

☞ **connection to standard kitchen faucet with outer thread (M22x1) with special diverter valve** (a adapter for faucets with inner threading M24x1 is also contained)

☞ **Do not use behind a depressurized storage water heater !**

☞ **Do not attach to a shower faucet !**

☞ **Operate only with cold water !**
Protect from freezing.

■ **Suitable filter cartridges:**

- ☞ all CARBONIT® standard filter cartridges (9³/₄" max 76 mm diameter).
- ☞ standard equipment: NFP Premium

■ **scope of supply**

complete filter device with connection hose and special diverter valve with inner threading. A CARBONIT® Monoblock **NFP Premium** is included.

■ **available versions:**



SANUNO inoxS
standard



SANUNO inoxF
with bottom

Further informations, expert assessments, certificates and up-to-date developments can be found online at www.carbonit.com.